



WASTE BALING PRESSES

Baler, hydraulic press PAAL Pacomat 5

Technical specification

Max. pressure:	50 tons	Year of production:	2006
Unit pressure:	7.14 kg/cm ²	Number of strappings:	3 in horizontal
Cross-section of the channel:	1000 x 700 mm	Filling inlet:	150 x 95 cm
Bale weight:	do 500 kg	Weight:	ca. 10 tons
Supply:	400 V/ 22 kW	Bale tying:	automatic, wire

Efficiency on idle: max 100 m³/ hour

Theoretical efficiency with material in density 30 kg/m³ 3 tons/hour


Theoretical efficiency with material in density 60 kg/m³ 6 tons/hour

Theoretical efficiency with material in density 100 kg/m³ 10 tons/hour

- Open charging hole allows the filling with the conveyor belt .
- Knives on the press plate and frame of the baler to cut off the excess material
- Automatic regulation of the light of the channel
- Automatic bale tying with the wire
- Choosing the length of the finished bale from the operator panel
- Pressing plate which is stable carried on the big rolls
- Big flops of the press chamber for easier maintenance

Dimension:

PACOMAT

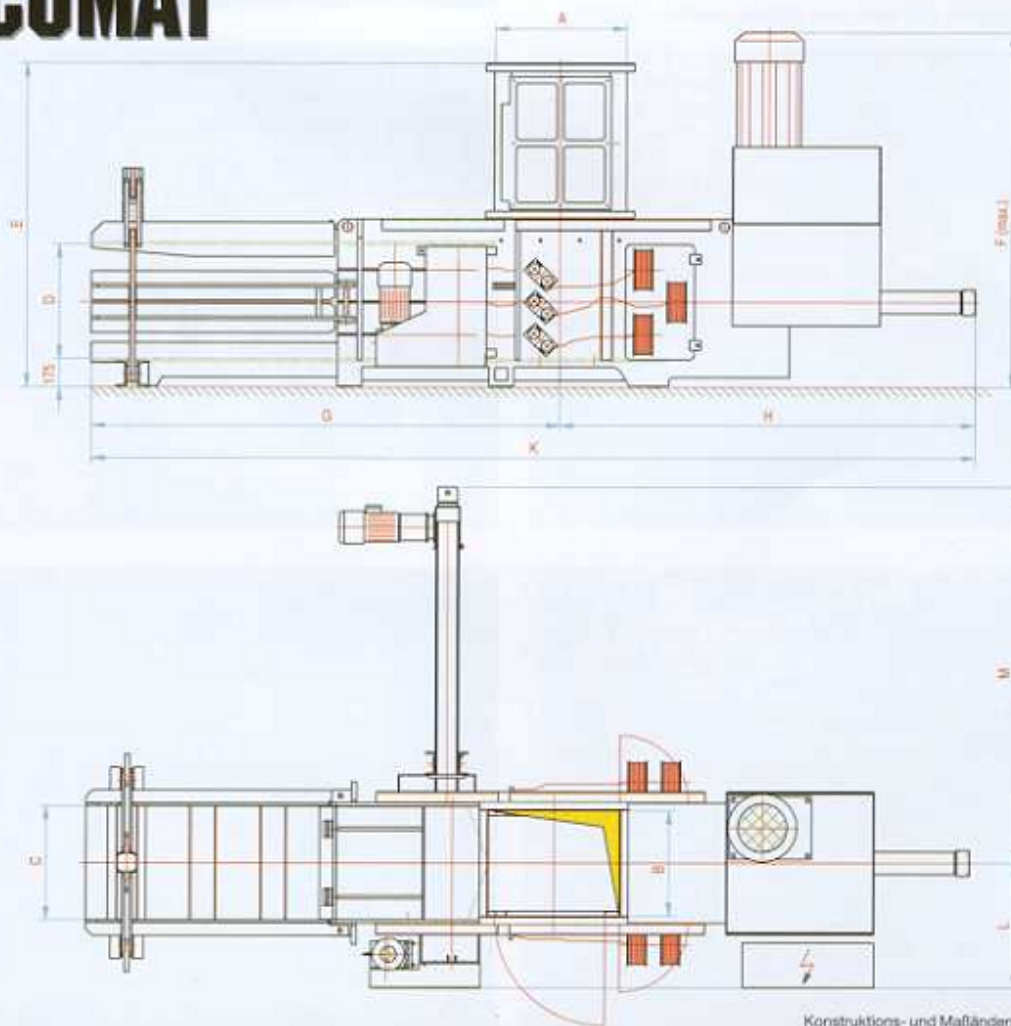


Konstruktions- und Maßänderungen vorbehalten

Abmessungen:	mm	A	B	C	D	E	F	G	H	K	L	M	N
PACOMAT	V	1500	950	1000	700	2060	2350	4500	4300	8800	1010	2800	2070



Zdjęcia poglądowe

Nasze instalacje



Masz pytania zadzwoń +48 33 816 01 69
Więcej maszyn na www.belowniceuzywane.pl

ARTechnic
ul. Gen. St. Maczka 9
43-300 Bielsko-Biała, POLAND

INFOLINIA: 801 000 816
tel.: +48 33 816 01 69
fax: +48 33 443 20 46

www.artehnic.pl
www.belowniceuzywane.pl
biuro@artehnic.pl