

Baler, hydraulic press PAAL Konti 325 C

Technical specification

Max. pressure:	85 tons	Year of production:	1993
Unit pressure:	103 tons/m ²	Number of strappings:	4 - fold vertical
Cross-section of the channel:	750 x 1100 mm	Filling inlet:	1020 x 1750 mm
Supply:	400 V/ 45 + 30 kW	Weight:	ca. 26 tons
Bale weight:	500-900 kg	Bale tying:	automatic, wire

Efficiency under load: max 485 m³ / hour


Theoretical efficiency with material in density 35 kg/m³) 10 tons/hour

Theoretical efficiency with material in density 60 kg/m³) 18 tons/hour

Theoretical efficiency with material in density 100 kg/m³) 25 tons/hour

Description of the functions:

- Open charging hole allows the filling with the conveyor belt
- Knives on the pressing plate and on the frame of the baler to cut off the excess material
- Automatic blades cleaning system of stucked material
- Automatic regulation of the pressing channel
- Changing the length of the finished bale from the operators panel
- The compact hydraulic power pack with a low noise level
- Pressing plate which is stable carried on 8 big rolls
- Big flaps on the pressing chamber for easier maintenance
- 2 sets of photocells in feeding chopper
- Oil cooler
- Automatic wire tying system with the wire (4 vertical)

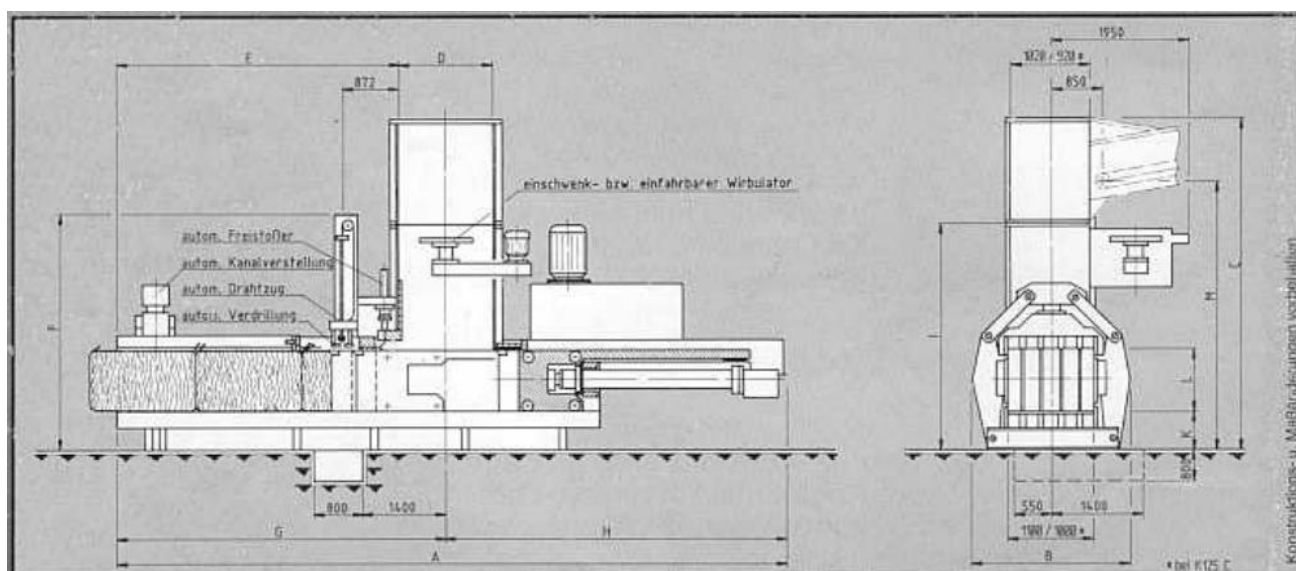

Abmessungen (mm)

KONTI	A	B	C	D	E	F	G	H	I	K	L	M
325 C	12 040	2 152	5 500	1 750	5 045	3 775	5 920	6 120	3 150	475	750	4 200

Optional Steering (film)

Illustrative photos



Zdjęcia poglądowe

Nasze instalacje



Masz pytania zadzwoń +48 33 816 01 69

Więcej maszyn na www.belowniceuzywane.pl

ARTechnic
ul. Gen. St. Maczka 9
43-300 Bielsko-Biała, POLAND

INFOLINIA: 801 000 816
tel.: +48 33 816 01 69
fax: +48 33 443 20 46

www.artehnic.pl
www.belowniceuzywane.pl
biuro@artehnic.pl